

KEL - JUMBO

Cable entry frames



Description	Type	Order No.	Dimension length width height	PU
-------------	------	-----------	--------------------------------------	----


1

Product description

The KEL-JUMBO cable entry system for installation of cables and conduits with a diameter up to 65 mm, especially suited for supply cables.

The innovative insert design enables dynamic and flexible movement.

We recommend round cut-outs, which can be made using standard tools.
Suggested cut-out: cable diameter + 15-20%.




KEL - JUMBO 1

42360

110 x 116 x 35

1

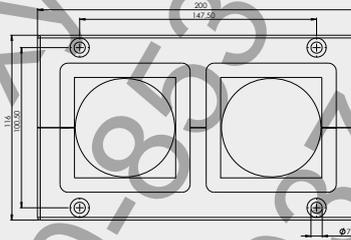

KEL - JUMBO 2

42350

200 x 116 x 35

1

Advantages

- Installation of cables up to 65 mm
- KTF-inserts allow dynamic and flexible movement
- Retrofitting and maintenance can be carried out easily and quickly

Specification


Material	Polyamide
Flame class	UL-94 Vo, self-extinguishing
Protection class	IP 54
Temperature	- 40°C to + 140°C (static)
Properties	halogen-free, silicone-free
Cut-out dimensions	round, cable diameter + 15%

Accessories

KTF Cable inserts	Page 35
KDR2 Split base plates	Page 102 103
MP Module plates	Page 112

KTF

Inserts for KEL-JUMBO

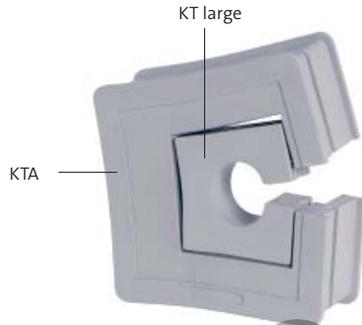

Type	Order No. grey	Clamping range	PU
KTF 00	42371	Blind Insert	1
KTA	42370	Adapter Insert for KT large	1
KTF 34	42376	33 - 36 mm	1
KTF 38	42379	37 - 40 mm	1
KTF 42	42382	41 - 44 mm	1
KTF 46	42385	45 - 48 mm	1
KTF 50	42388	48 - 52 mm	1
KTF 54	42391	53 - 56 mm	1
KTF 58	42394	56 - 60 mm	1
KTF 62	42397	61 - 65 mm	1

Product description

The inserts range KTF are suitable for cable diameters up to 65 mm.

Suitable KEL-JUMBO cable entry frames, see page 34.

Comparatively small assembled cables with large inserts can be routed by using the adapter insert.

Specification

Material	Elastomer
Flame class	UL-94 Vo, self-extinguishing
Protection class	IP 54
Temperature	- 40°C to + 90°C (static)
Properties	halogen-free, silicone-free

Accessories

KEL - JUMBO Cable entry frames	Page 34
KT large	Page 26